


GexSIS-125

HIGH-PERFORMANCE
SWITCHBOARD WIRE &
GROUNDING CABLES

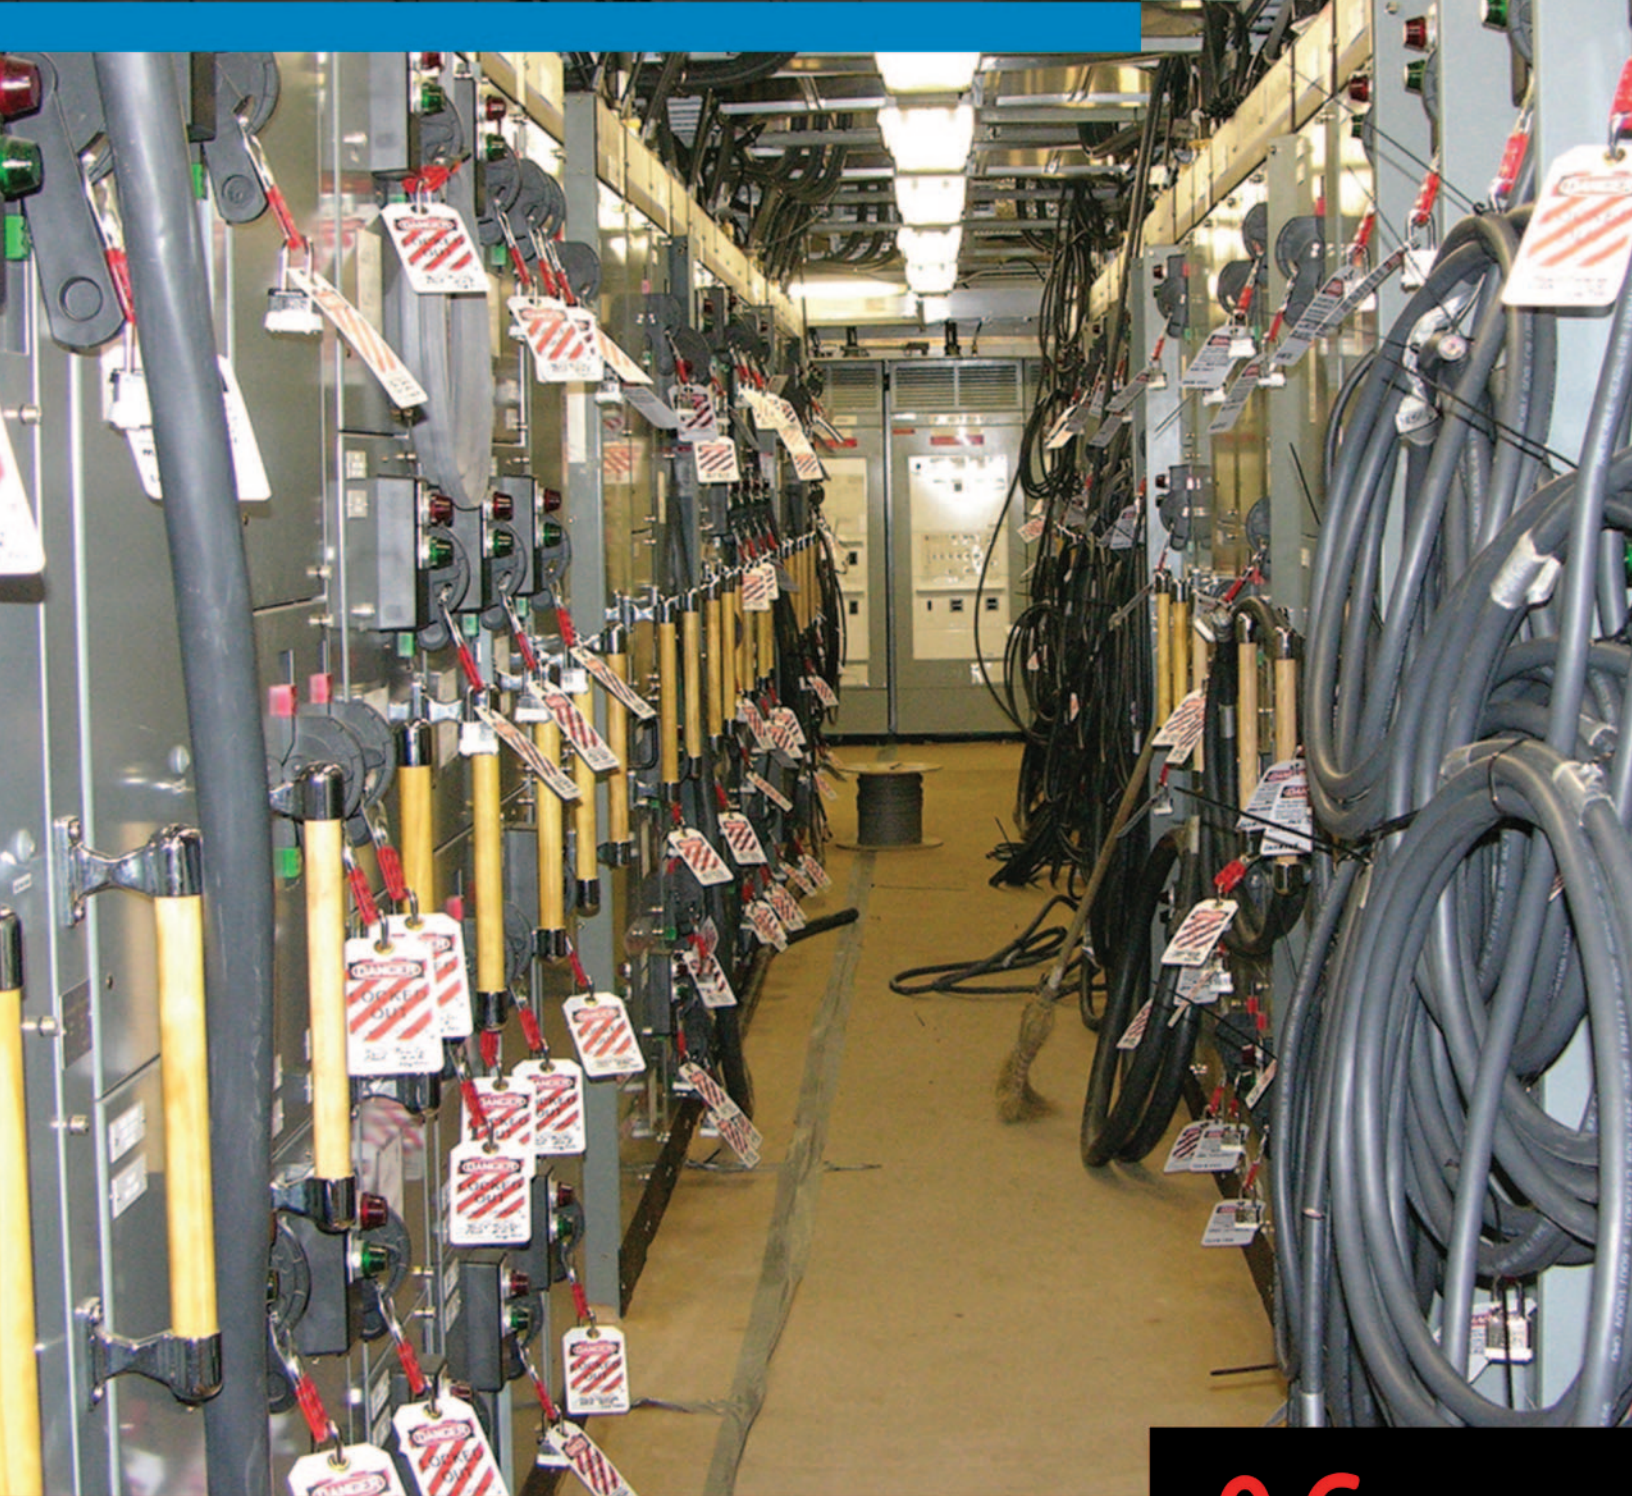


ENERGY GROUP

Nexans
AmerCable

GEXSIS-125

HIGH PERFORMANCE SWITCHBOARD WIRE

Extremely Flexible • GEXOL® Insulated • Rated 110°C

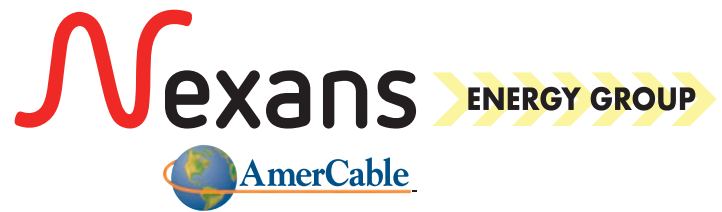

APPLICATION

A flexible, highly durable wiring cable designed for electrical panels, control panels and other electrical apparatus such as switchboard and hook-up wiring. May be used for power, control or electronics wiring.

Constructed with Nexans AmerCable's premium GEXOL® thermoset insulation, GexSIS-125 is UL listed and classified to IEEE-45.

Available in a variety of colors or standard dark grey jacket.

RATINGS AND APPROVALS:

- 125°C Manufacturer's Temperature Rating
- UL Listed 110°C Marine Shipboard Cable meeting
- UL 1309 Type X110P
- UL Classified IEEE-45 Type P (1998 standard and 1993 draft)
- 600/1000V UL/IEC
- UL Type SIS 90C
- VW-1 Rated



Advantages of GexSIS-125 cable over standard National Electrical Code Type SIS wire:

- GexSIS-125 is UL rated 110°C in dry locations and 90° in wet locations. Standard Type SIS is rated 90°C in dry locations only.
- GexSIS-125 passes the long term wet electricals required for marine shipboard cable. Standard SIS wire is not required to meet any long term wet electrical tests.
- GexSIS-125 easily passes the VW-1 flame test. A VW-1 flame rating is optional for standard Type SIS wire (in fact, the majority of Type SIS sold in the U.S. is not VW-1 rated).
- GexSIS-125 is nonchlorinated. Type SIS that is VW-1 rated is typically heavily chlorinated and when burned emits toxic and highly corrosive gases.
- GexSIS-125 uses highly flexible tinned-copper conductors. Standard Type SIS uses coarse building wire conductors.
- GexSIS-125 is insulated with GEXOL® a flexible crosslinked polyolefin material. Standard Type SIS is insulated with rigid commercial grade XLPE. Gexol has been used successfully in the harsh offshore drilling rig environment for 20+ years.
- GexSIS-125 is available in conductor sizes 18 AWG to 1111 Kcmil, (although only sizes 14 – 4/0 are UL listed SIS). Standard SIS is only available in sizes 14 – 4/0.
- GexSIS-125 has broader applications with the additional UL Marine Shipboard Cable Listing. Type SIS is strictly limited to switchboard wiring.
- GexSIS-125 is available in a variety of colors for easy circuit verification of correct use.

GEXSIS-125 HIGH PERFORMANCE SWITCHBOARD WIRE

Extremely Flexible • GEXOL® Insulated • Rated 110°C

PRODUCT LINE DIMENSIONS




Size AWG Kcmil	Part No. 37-102	Stranding	Insulation Thickness (mils)	Nominal Diameter (inch)	Approx. Weight (lbs/1000ft)	Ampacity	
						90°C Cond.	110° C Cond.
18	151	19/30	30	0.115	11	16	30
16	153	19/.0117	30	0.125	14	21	35
14	154	19/.0147	30	0.140	20	30	41
12	156	19/.0185	30	0.160	28	35	64
10	158	37/.0167	30	0.180	41	48	85
8	159	37/24	45	0.235	63	70	112
6	160	61/24	45	0.275	98	91	148
4	162	133/.0177	45	0.352	162	122	196
2	164	133/.0223	45	0.425	247	165	259
1	165	209/24	55	0.480	320	191	298
1/0	166	266/24	55	0.525	400	226	344
2/0	167	342/24	55	0.580	507	261	396
3/0	168	418/24	55	0.630	613	305	457
4/0	169	532/24	55	0.710	770	352	528
262	170	646/24	65	0.810	944	396	599
313	171	777/24	65	0.880	1117	439	604
373	172	925/24	65	0.930	1318	496	674
444	173	1110/24	65	1.000	1570	535	750
535	174	1332/24	80	1.170	1904	609	839
646	176	1591/24	80	1.230	2256	679	937
777	177	1924/24	80	1.313	2711	770	1048
1111	179	2745/24	110	1.605	3933	918	1303

*Based on Table 310-17 of the NEC for single conductor in free air adjusted to a 45°C ambient.

**Based on IEEE Std. 835-1994 for single conductor in free air with a 45°C ambient.

Publication: DH-031099

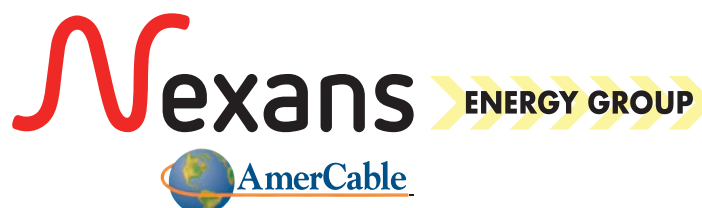

1/C MARINE GEXOL® 600V GREEN/YELLOW STRIPE GROUNDING CABLE

Conductors

Soft annealed flexible stranded tinned copper per IEEE 1580 Table 11.

Insulation

Green GEXOL® Cross-linked Polyolefin (XLPO), with an extruded yellow stripe



APPLICATION


A flexible, highly durable grounding cable constructed with Nexans AmerCable's premium Gexol® thermoset insulation.

RATINGS & APPROVALS

- 125°C Manufacturer's Temperature Rating
- UL Listed 110°C Marine Shipboard Cable meeting
- UL 1309 Type X110P
- UL Classified IEEE-45 Type P (1998 standard and 1993 draft)
- CSA Listed as Marine Shipboard Cable
- 600/1000V UL/IEC
- UL Type SIS 90C
- VW-1 Rated


JACKET MARKING

AMERCABLE GEXSIS-125 (SIZE) 1/C UL MARINE SHIPBOARD 110C TYPE SIS-VW1 90C UL 600V/1000V IEC (YEAR) - 37102XXXGRNYEL

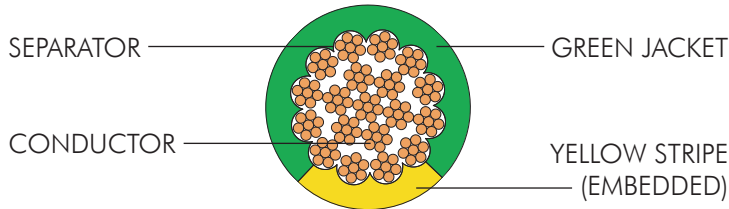

Size	Part Number	Diameter	Weight* lbs/1000ft	Ampacity 100°C*
10	37-102158GRNYEL	0.180	41	58A
8	37-102159GRNYEL	0.236	64	72A
2	37-105164GRNYEL	0.425	247	169A
2/0	37-102167GRNYEL	0.590	507	262A
4/0	37-102169GRNYEL	0.710	770	351A

*Single banked values at 45C Ambient

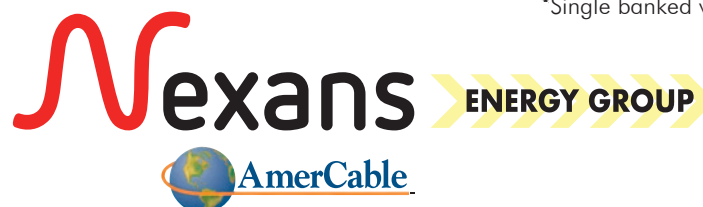

FOLLOW US!

